

Studies show that as much as 50% of the air in the upper levels of your home come from the basement or crawl space. This air typically contains high levels of moisture. As a result, it causes musty odors and symptom-triggering allergens such as mold spores, mildew, bacteria, and dust mites. This damp air in your crawl space or basement may damage the structure of your home, flooring, furniture, and other personal items stored in these spaces. That's why it is so important to control the relative humidity in these areas with a Santa Fe Dehumidifier.

Tight spaces are no problem for the **Santa Fe Compact2** dehumidifier. Its compact size works perfect in low crawl spaces and small basements without sacrificing power and performance. Designed to fit in a variety of small spaces, the Compact2 provides multiple installation options for greater flexibility.

- **Small footprint** (12"x12"x21") fits low crawl spaces, basement mechanical closets, or other small spaces
- Sized to fit between floor joists for **convenient hanging installation**
- Rotatable exhaust outlet provides for **horizontal or vertical discharge**
- **Exceeds ENERGY STAR®** efficiency requirements
- **Large capacity** water removal of 70 pints/day
- MERV-8 Filter provides **superior air filtration** (MERV-11 option available)
- Engineered for **low temperature operation** and the air flow issues that crawl spaces present
- **Ducting options** for divided spaces
- **Auto restart** allows the dehumidifier to automatically restart after a power outage




One of the best Limited Warranties in the industry.



www.Santa-Fe-Products.com
1.800.533.7533




Part Number:	4033600	
Blower:	150 CFM @ 0.0" WG	
Power:	580 watts @ 80°F and 60% RH	
Supply Voltage:	115 volt – 1phase – 60 Hz	
Current Draw:	5.1 amps	
Operating Temp.:	49°F Min., 95°F Max.	
Sized For:	(Refer to website for more sizing considerations)	
Crawl Space		
Very Tightly Sealed	Up to 3,000 Sq. Ft. (15,000 Cu. Ft.)	
Moderately Sealed	Up to 2,200 Sq. Ft. (11,000 Cu. Ft.)	
Some Leaks & Imperfections	Up to 1,800 Sq. Ft. (9,000 Cu. Ft.)	
Basement		
Very Tightly Sealed	Up to 2,300 Sq. Ft. (23,000 Cu. Ft.)	
Moderately Sealed	Up to 2,000 Sq. Ft. (20,000 Cu. Ft.)	
Some Leaks & Imperfections	Up to 1,800 Sq. Ft. (18,000 Cu. Ft.)	
Minimum Performance at:		
	80°F and 60%RH	70°F and 60%RH
Water Removal:	70 Pints/Day	47 Pints/Day
Efficiency:	5.0 Pints/kWh	3.9 Pints/kWh
Energy Factor:	2.4 L/kWh	1.9 L/kWh
Air Filter:	MERV-8, Standard Pleat	
Size:	9" x 11" x 1"	
Power Cord:	9', 115 VAC, Ground	
Drain Connection:	3/4" Threaded Female NPT	
Drain Hose:	8' Direct Gravity Drain Hose (5/8" ID x 7/8" OD)	
Refrigerant Type:	R410A (Refer to manufacturers label for more information)	
Refrigerant Amount:	15 oz.	
Dimensions:	Unit	Shipping
Width:	12"	18"
Height:	12"	18"
Length:	21"	27"
Weight:	55 lbs	64 lbs
Optional Accessories:		
4027168	Pre-Filter	
4028524	Pre-Filter 12-Pack	
4029748	MERV-8 Filter (9"x11"x1")	
4030421	MERV-8 Filters 4-Pack + 1 Pre-Filter	
4030422	MERV-8 Filters 12-Pack	
4030671	MERV-11 Filter (9"x11"x1")	
4027418	MERV-11 Filters 4-Pack + 1 Pre-Filter	
4030733	MERV-11 Filters 12-Pack	
4030113	Pump Kit	
4028616	Caster Kit	
4029908	Hang Kit	
4030203	Duct Kit, Supply Only	
4030204	Duct Kit, Return Only	
4027415	8" Flex Duct 25'	
4020177	8" Flex Insulated Duct 25'	
4020175	Remote Dehumidistat	

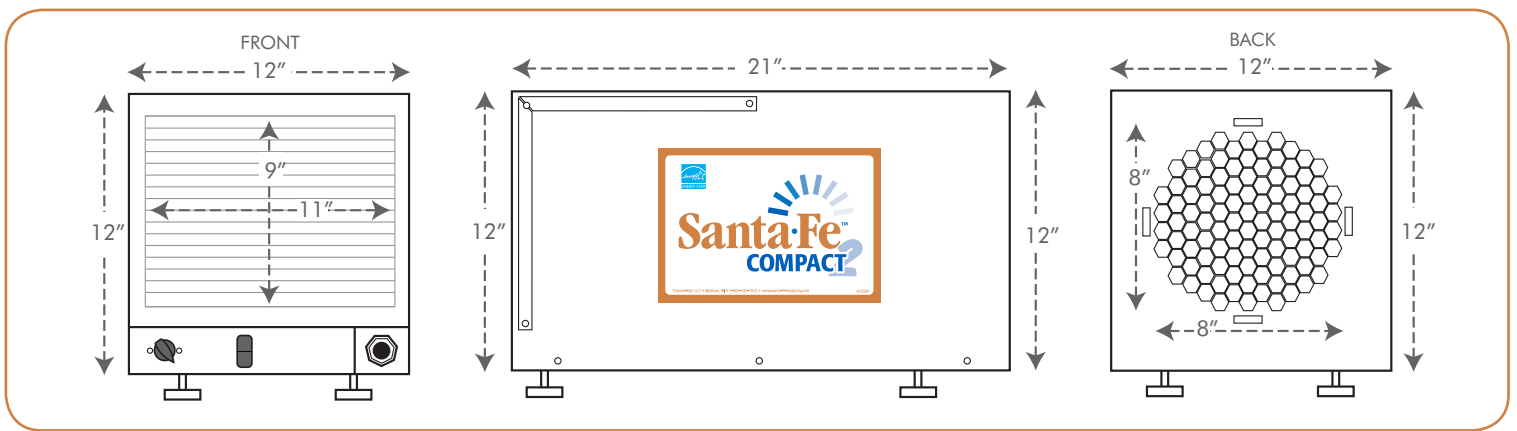


Recommended Installations for Ducting to Finished Areas

Installation of a Santa Fe Compact2 With The Use of a Supply Duct Kit Only

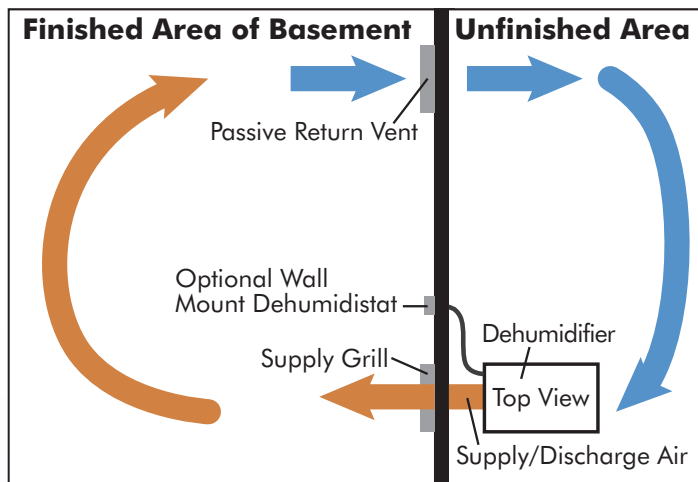

- Place the Santa Fe Compact2 in the unfinished area of the basement, near a drain access (condensate will drain via gravity or with an optional pump kit).
- Using the supply duct collar, supply the dry air from the dehumidifier into a large, open area in the finished section of the basement.
- Place a return grill / passive vent on the other side of the wall that separates the finished and unfinished areas. This will allow for a circular air flow throughout the basement.
- The passive grill will prevent the unfinished room from being placed under a negative pressure and also allow the dehumidifier to focus on keeping the unfinished area dry as well.
- The onboard dehumidistat control can be used on the unit for this application or a 120 volt dehumidistat can be placed in the finished basement as well (we recommend using an electrician to run the wiring).
- Be sure to keep all doors open to any other rooms in the basement to help with proper air circulation (bedrooms, bathrooms, etc.)

Installation of a Santa Fe Compact 2 With a Return and Supply Duct Kit

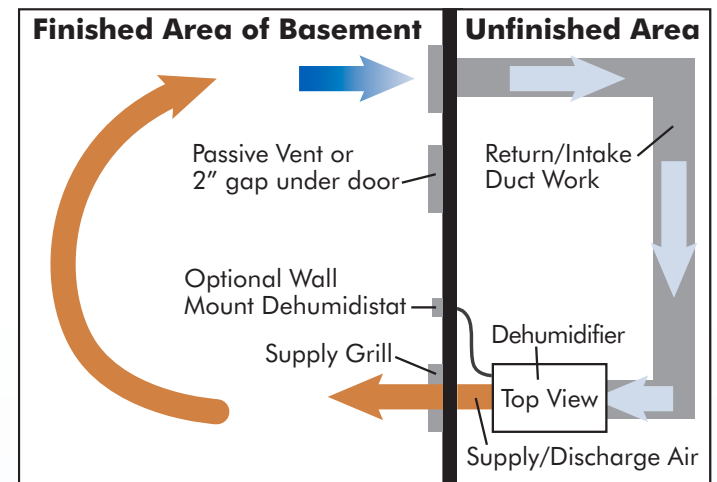

- This installation option represents the use of a Santa Fe Compact 2 with a return and supply duct kit.
- Place the Santa Fe Compact 2 in the unfinished area of the basement, near a drain access (condensate will drain via gravity or with an optional pump kit).
- Using the supply and return duct kit, supply the dry air from the dehumidifier into a large, open area of the finished basement. Use the return duct kit to draw air back through the dehumidifier.
- Be sure the return and supply are at least 10 feet away from each other for proper air flow throughout the basement. Add a passive grill between the finished and unfinished areas or have a 2" gap under the door separating the two rooms. This will help keep the unfinished area dry as well.
- Use the 120 volt, wall mounted dehumidistat for this installation for proper run time on the dehumidifier (we recommend using an electrician to install the separate 120 volt control).
- Be sure to keep all doors open to any other rooms in the basement to help with proper air circulation (bedrooms, bathrooms, etc.)