



Germicidal UV Light System For Coils Up To 72" x 72"*

This system is designed to save energy and maintenance costs associated with commercial HVAC. A biofilm of only 0.002" can reduce efficiency by 37%! Ultraviolet germicidal irradiation (UVGI) is the most cost-effective and practical solution.

Blue-Tube XL offers easy and flexible installation. It includes an advanced multi-voltage water-resistant power supply. All parts (except lamps) are covered by a lifetime warranty. This system also improves indoor air quality by sterilizing airborne bacteria, viruses, and allergens.

SYSTEM BENEFITS

- 99.9% surface disinfection GUARANTEED
- Sterilizes mold, bacteria, viruses
- Disinfects coil & drain pan
- Improves HVAC system efficiency
- Improves indoor air quality

SYSTEM FEATURES

- Easy to install
- Fits coils from 18" x 32" to 72" x 72"
- 2 year guaranteed lamp life
- Includes everything needed for most installations
- Scalable design for multi-lamp configurations
- Lifetime warranty on all parts except lamp(s)
- Water-resistant heavy-duty power supply
- Optional door interlock switch (TUVC-INTLCK)



Simple & Easy

Fresh-Aire UV just made commercial UVGI easier with Blue-Tube XL. Kits are available for coils up to 72". Everything needed for most installations is included in the box.



800-741-1195

WWW.FRESHAIREUV.COM

© Fresh-Aire UV


SALES@FRESHAIREUV.COM

TUVC-BTXL-SPEC 2.8.19

Made in USA



Blue-Tube XL Coil Sizing Reference

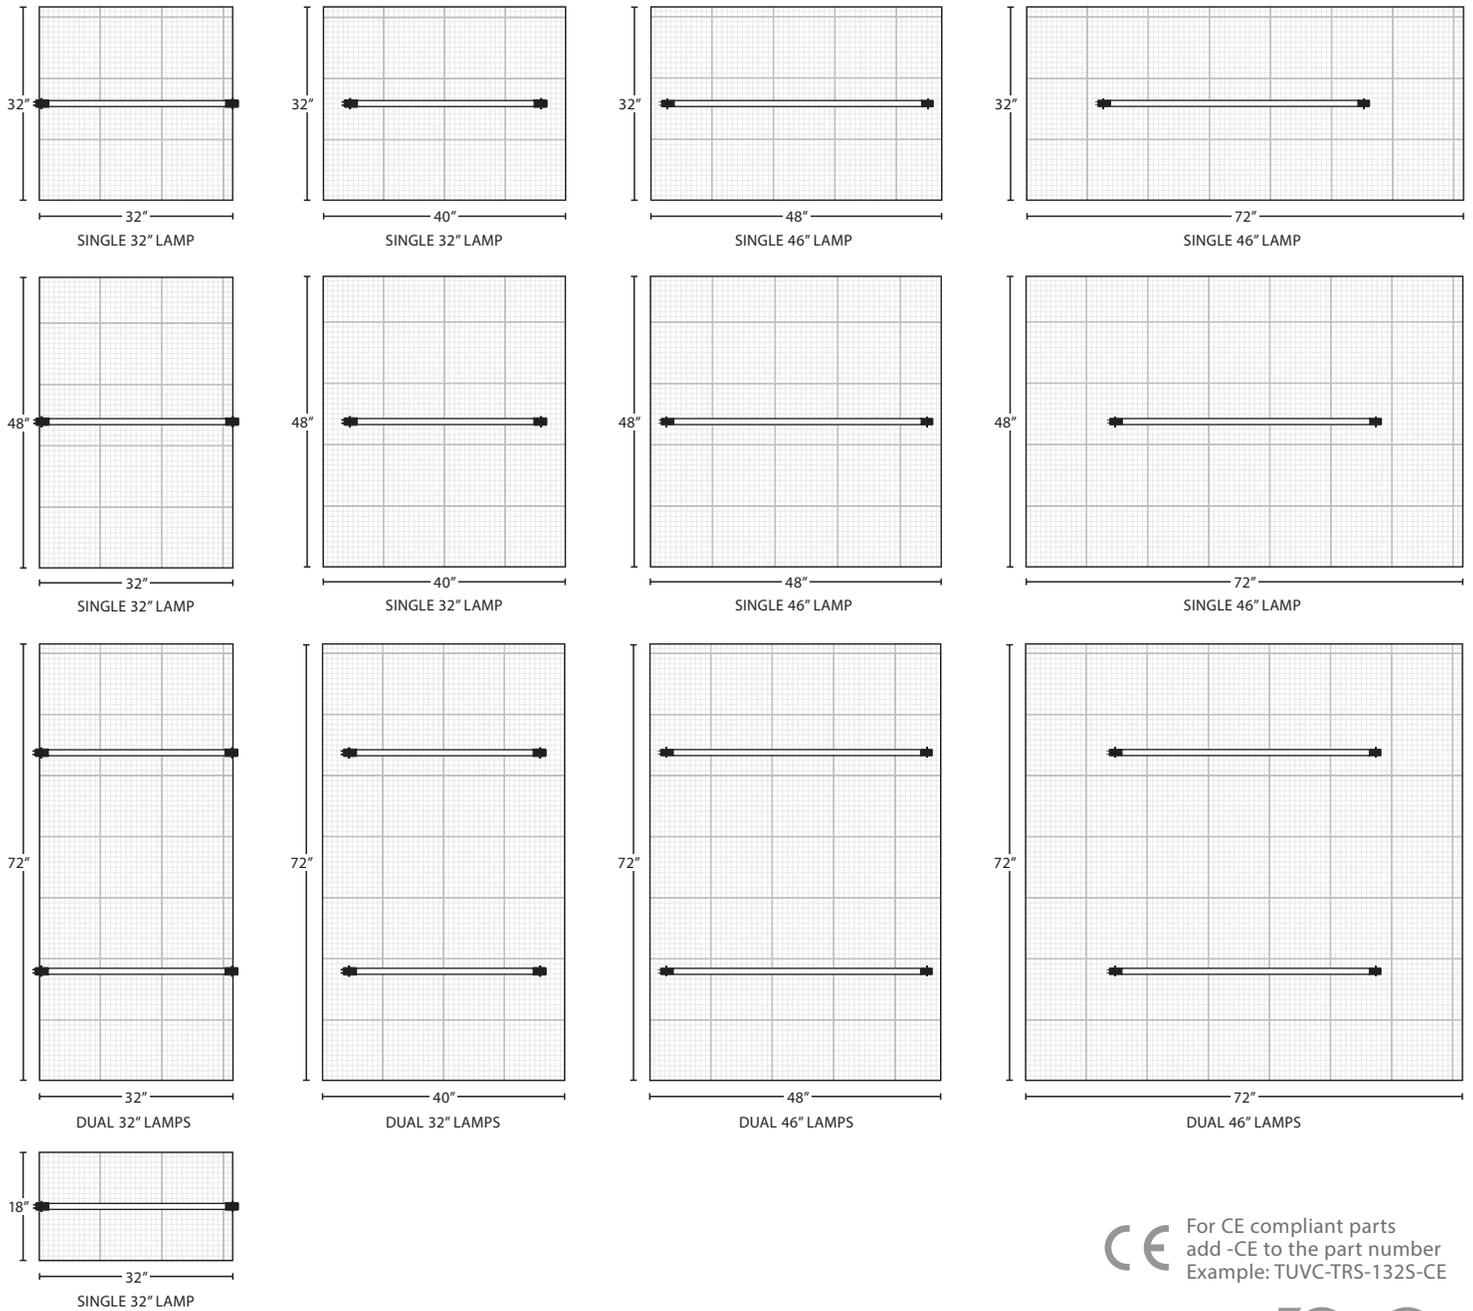

CE For CE compliant parts add -CE to the part number
Example: TUVCL-232HO-CE



Blue-Tube XL Specs

| KIT INCLUDES | | POWER SUPPLY DIMENSIONS | | ELECTRICAL |
|---|------------------------------------|-------------------------|--------------|-----------------|
| Remote power supply, 10' lamp cable, 6' power cord, UV lamp, mounting hardware and view port, 0.5" EMT conduit, magnets (4) | | 13"L x 3.75"W x 2.5"H | | 2-3 amps |
| KIT PART # | LAMP DESCRIPTION | LAMP PART # | POWER SUPPLY | POWER SUPPLY CE |
| TUVC-TRS-232S-HO-BTXL | 32" 18000 hrs, high output, single | TUVCL-232HO | TUVCPS-HS | TUVCPS-HS-CE |
| TUVC-TRS-232D-HO-BTXL | 32" 18000 hrs, high output, dual | TUVCL-232HO | TUVCPS-H32D | TUVCPS-H32D-CE |
| TUVC-TRS-246S-HO-BTXL | 46" 18000 hrs, high output, single | TUVCL-246HO | TUVCPS-HS | TUVCPS-HS-CE |
| TUVC-TRS-246D-HO-BTXL | 46" 18000 hrs, high output, dual | TUVCL-246HO | TUVCPS-H46D | TUVCPS-H46D-CE |